

BENEFITS OF SUGGESTED ADDERS FOR WOODWORKING

VACUUM RELIEF VALVE

Protects pump from reaching too deep of a vacuum, resulting in cavitating and/or hydraulic knock, potentially damaging the pump over time.

EXHAUST DRIP LEG


Piped to the discharge of the system to help scavenge oil carryover back into unit.

INLET FILTER

Located on the inlet of the vacuum pump (typically 5 microns) to prevent particulate from getting into the pump air stream and/or seal fluid.

SPIN-ON OIL FILTER

Prevents foreign particulate that enters the pump from causing a blockage or restriction in the heat exchanger, resulting in overheating issues.

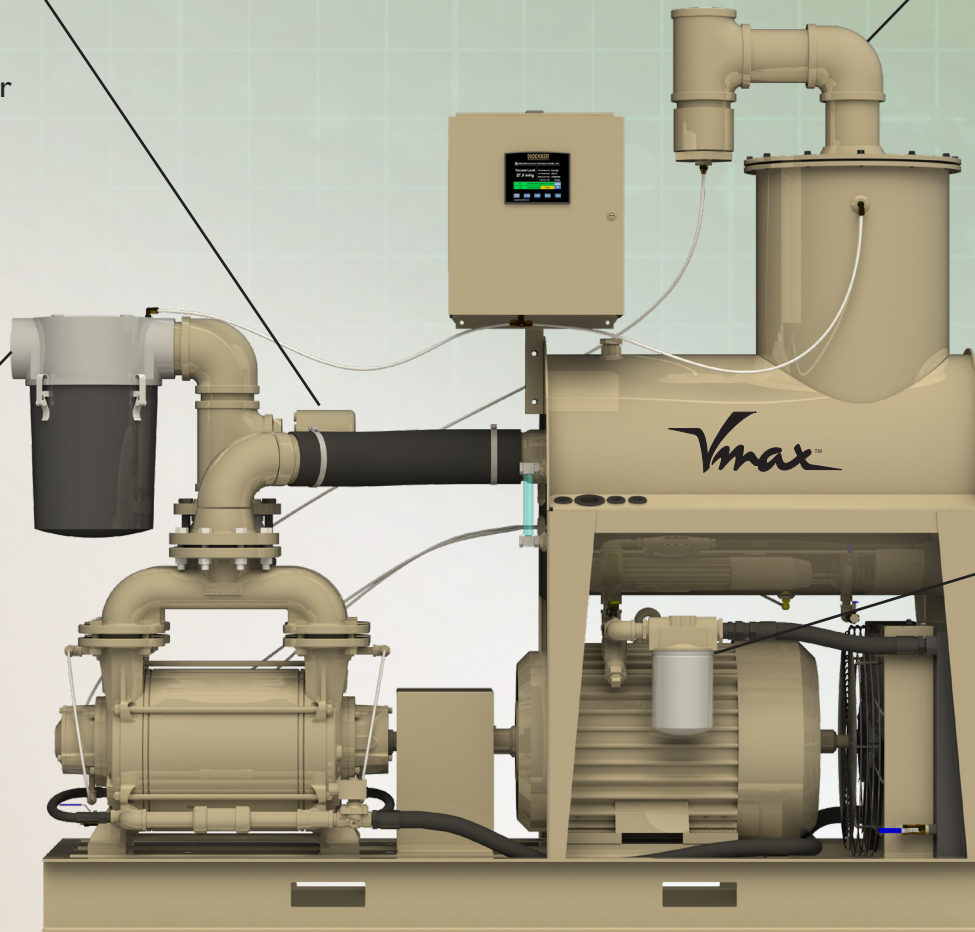

OIL-SEALED LIQUID RING VACUUM PUMP SYSTEMS

